

- NEPTUNE-C : Fine Atomization NEPTUNE-L : High Transfer Efficiency
- Magnesium gun body with PTFE coating prevents from stains on its surface and for easy cleaning.
- Improved rust prevention by adopting stainless steel parts to 'Fluid Passing Section' and 'Needle'.
- Improved handling by optimizing weight balance.
- Improved operability and durability by new design and adopting brass to Pattern valve, fluid adjusting knob and cheater valve. Enable smooth operation even when wearing gloves.
- Easy identification of guns usage by 4 colors snap-ring.



NEPTUNE - C - 777 - 11 PT

Atomization: C/L

Air Cap: C:777 / 797 L:805MT2 / 807MT2 Tip Size(C/L) :11 / 14 / 16



777





805MT2








Specifications											
Models	Atomization	Air Cap	Tip size (Ф mm)	Туре	Pattern range (mm)	Air cosumption (L/min)	Delivery (mL/min)	Weight	Air inlet	Fluid inlet	Applications
NEPTUNE-C	CONVENTIONAL	777	11 (1.1 mm) 14 (1.4 mm) 16 (1.6 mm)	Р	360	373 ∼ 418	0.3 ~ 0.35	378g	G 1/4		Automotive industry, Fine finishing, Wood, Plastic & Metal finishing
		797			330						
NEPTUNE-L	LVMP	805MT2			220	236 ~ 275	0.2 ~ 0.25	350g			
		807MT2			280						

• Conditions: Viscosity: 20sec(NK-2) Delivery: 200ml/min All regulators open All pattern knob open Spraying distance: 200 mm % For improvement purposes, Design & Specifications may change without prior notice.

## Features



## Connection Illustration (sample)

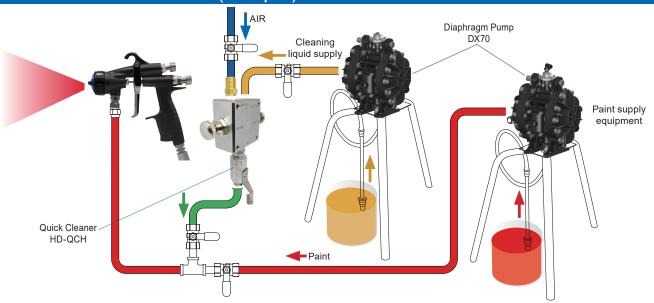

\* Above sample is the case of using HD-CGH (quick cleaner).



## CFT Ransburg Japan KK

15-5, Fukuura 1-chome, Kanazawa-ku, Yokohama, Kanagawa Japan 236-0004

TEL: +81-45-785-6434 / FAX: +81-45-785-6517

http://www.carlisleft.co.jp/

©2020 Carlisle Fluid Technologies

For more infomation, please contact:

21.09-2-1k(21.03)