


J4 Turbo Bell

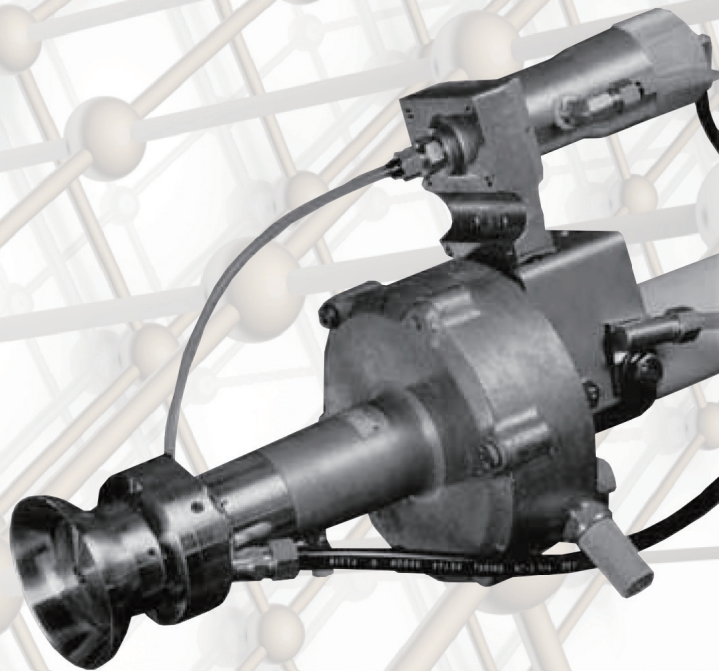


Features

- Paint consumption significantly reduced
- Equipment costs reduced due to the simplified paint booth
- Labor costs down
- Coating environments improved
- Paint losses and cleaning costs reduced
- Fine atomization due to high-speed rotation and fine finish achieved
- High Transfer Efficiency
- The rotation speed, shaping air pressure and delivery can be freely changed by remote control operations to achieve the best value easily for various coating conditions.
- Applicable to a wide range of workpieces.
- Supported materials expended
- 2-component coating material mixed inside the bell

Installation Example

Ransburg®

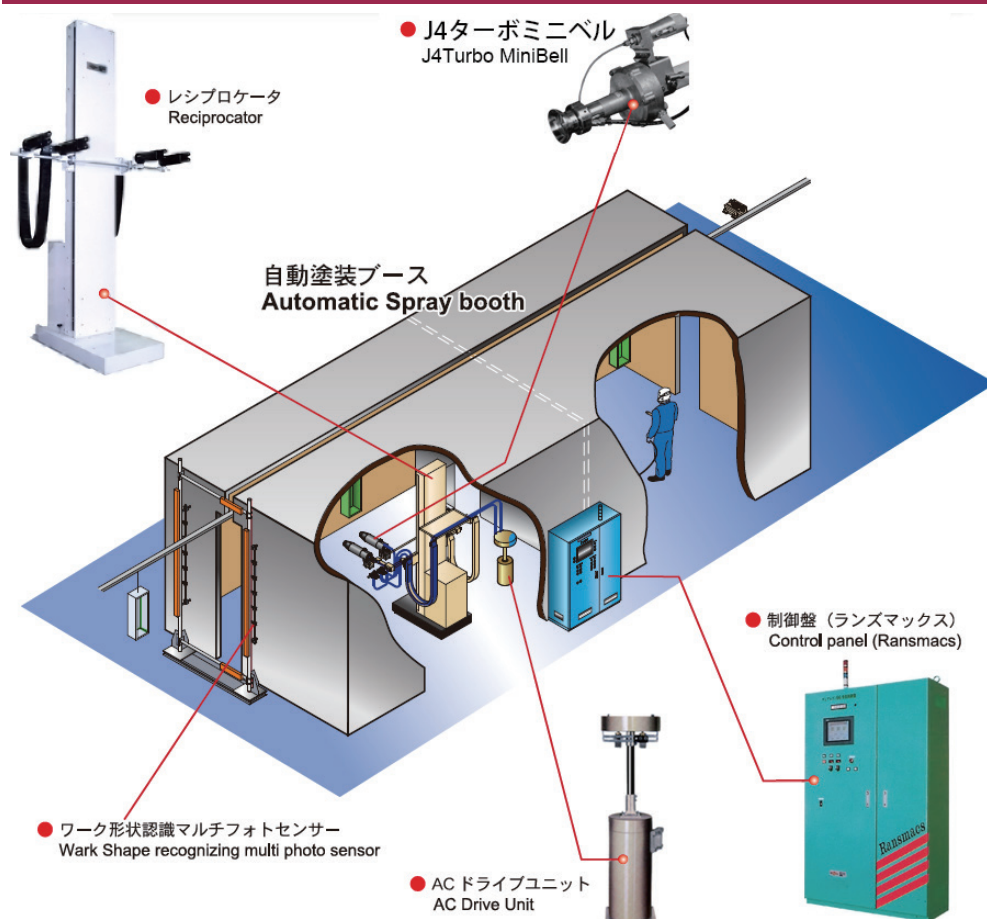

Specifications

- Bell cup diameter : 60Φ
- Bell rotation speed (Max.) : 30,000rpm
- Air consumption : Turbine 150L/min
Shaping 350L/min
Seal Air 30L/min
- Max fluid delivery (recommended) : 250 mL/min
- Cascade max. output voltage : DC-90kV
- Weight : 7.0 Kg

Peripheral Equipment

- High Voltage Power Supply Equipment (C Type) / Spark Guard (Detecting Overloaded Currency)



- Ground Switch



- AC Pump unit



※ For improvement purposes, Design & Specifications may change without prior notice.

Ransburg
CFT Ransburg Japan KK

15-5, Fukuura 1-chome, Kanazawa-ku, Yokohama, Kanagawa Japan 〒236-0004
TEL : +81-45-785-6421 / FAX : +81-45-785-6517

<http://www.carlisleleft.co.jp>

© Ransburg is a registered trademark of Carlisle Fluid Technologies.

For more information, please contact: